

## Modern Small Lantern

Item # RL 5175


### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 1. Thread lower pole (F) into top of socket assembly (J).
- 2. Thread the inner rod of upper pole (E) into lower pole (F).
- 3. Thread the inner rod of upper pole (E) into the bottom opening of fixture base (D). Insert light bulbs (not included) into the sockets.
- 4. Insert glass cylinder (H) into the ring of part (K).
- 5. Place ring (G) onto the top of glass cylinder (H).
- Remove mounting plate (A) from fixture base (D) by unscrewing base screws (C). Affix mounting plate (A) onto ceiling outlet box and secure with mounting screws (B).
- Attach the ground wire (bare wire) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
- 8. Connect the neutral wire from the fixture (ridges molded wire) to the nentral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
- Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical type. Be sure that no wire strands are exposed.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.

# RALPH LAUREN

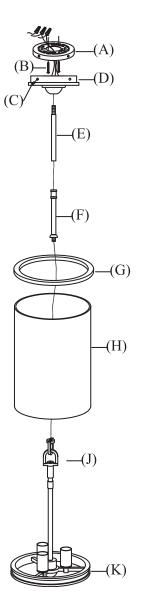

## Modern Small Lantern

Item # RL 5175

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

 Attach fixture base (D) to the affixed mounting plate (A), align the holes on the side, insert base screws (C) into the holes to secure the fixture base (D) to the mounting plate (A). Restore power and test fixture.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

.

DRY

## RALPH LAUREN